6 Bypass Caps on solder side: 0805 SMD, 35V or higher rated, 47nF or 100nF

Ladder Capacitors : 40× 15nF (spacing 5mm or 7.5mm) like Wima MKS-2, 5%

Ladder ICs: 10× CA3046 or 10× CA3086 or 20× LM394 or 20× SSM2210

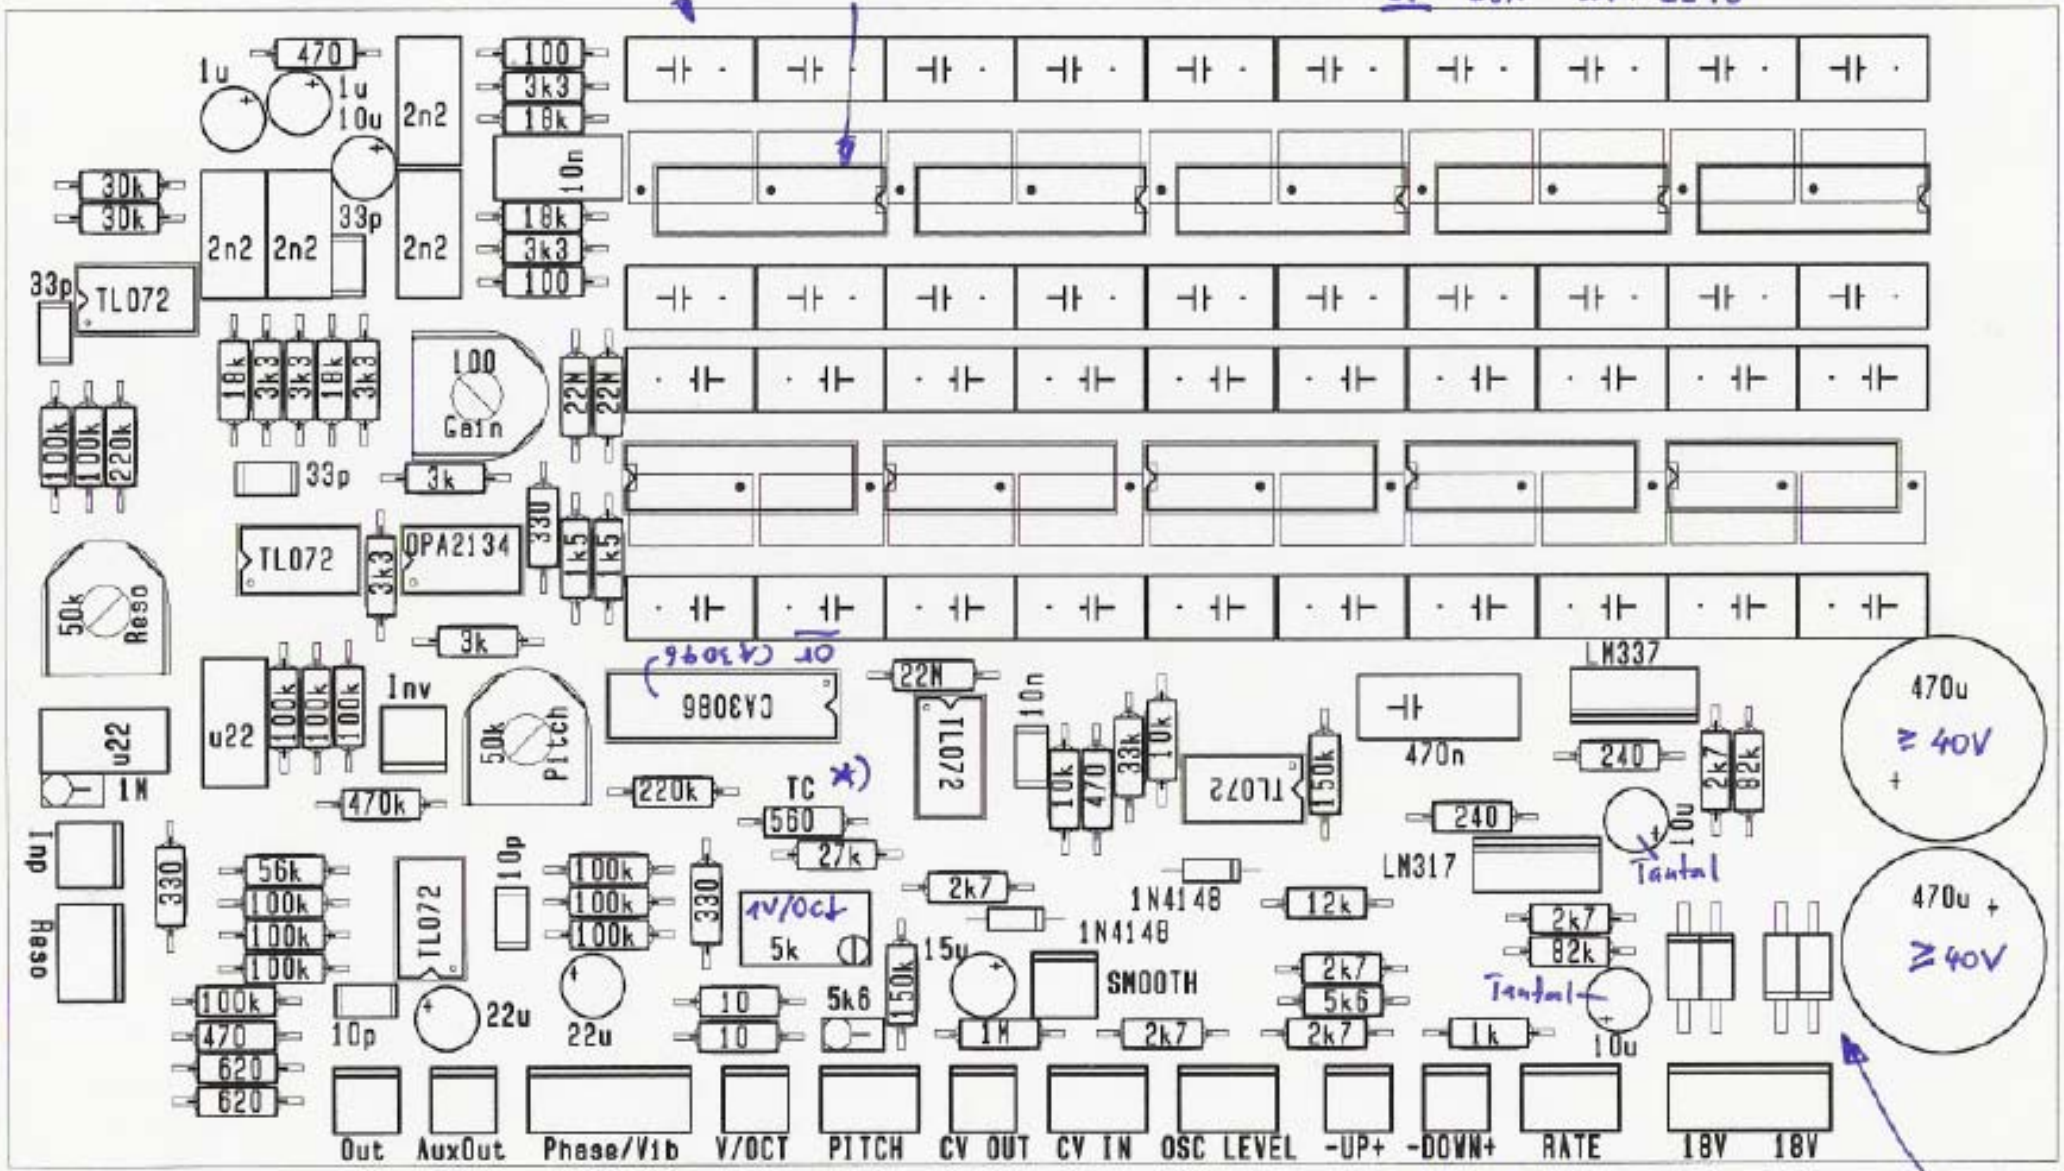

*) Other Tempco Resistor Values possible, with different values for 1 Resistor and 1 Trimpot

unmarked electrolytic caps are ≥25V

4× 1N4002

© J. Haible 2007